

WASHTECH


PROFESSIONAL WASH SYSTEMS



5 years warranty on stainless cabinet (parts only)
2 years warranty on wash pump (parts and labour)
1 year parts and labour warranty

The WASHTECH GE glasswasher is a fast compact machine for busy bars.

- ★ The GE is compact - only 670mm tall (without legs) - making it suitable for shelf or wall bracket mounting
- ★ Legs supplied standard standard provide the regulation clearance of 150mm and will extend to 200mm
- ★ Rinse temperature booster tank
- ★ Ease of Servicing - Electromechanical controls and componentry all fully accessible from the front of the machine
- ★ Quality T304 stainless steel construction
- ★ Comprehensive parts and labour warranty
- ★ Supported by the Washtech nationwide service network

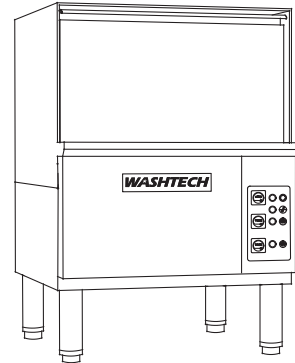

GE Specifications

Cycle time	60 seconds
Rack size	up to 435mm x 435mm
Wash & rinse system	Non recirculating via lower rotating spray arm.
Cold Rinse	Via upper rotating spray arm
Detergent injector	Hydraulic
Rinse cycle	Hot 12sec / Cold 12sec
Rinse heating	2500W
Shipping Dimensions	640w x 590d x 800h = 0.3m ³ 43kg

Standard accessories

- 2 only water supply hoses
- 1 set of legs adjustable 150-210mm
- Rack Adaptor


Options - To be specified with order

Racks 435mm x 365mm

Installation notes – refer drawing for connection points

- A Hot Water**
 - Connection 3/4" BSP via supplied hose
 - Temperature 65°C +/- 5°C
 - Pressure 200 to 400 kpa
 - Flow rate 20 to 25 litres per minute
 - Consumption 7 litres hot water per cycle
- D Cold Water**
 - Connection 3/4" BSP via supplied hose
- B Waste**
 - 40mm connection
 - Direct through rear of machine or the hole in base
- C Power**
 - 15 amp, 240V, 50Hz

- ★ Recommended minimum recess dimensions
 - with legs 510mm(w) x 600mm(d) x 810mm(h)
 - without legs 510mm(w) x 600mm(d) x 680mm(h)
- ★ Legs available on request for non-standard bench heights
- ★ Allow space for detergent container
 - 20 litre chemical containers each require about 250mm(w) x 350mm(d) x 450mm(h)

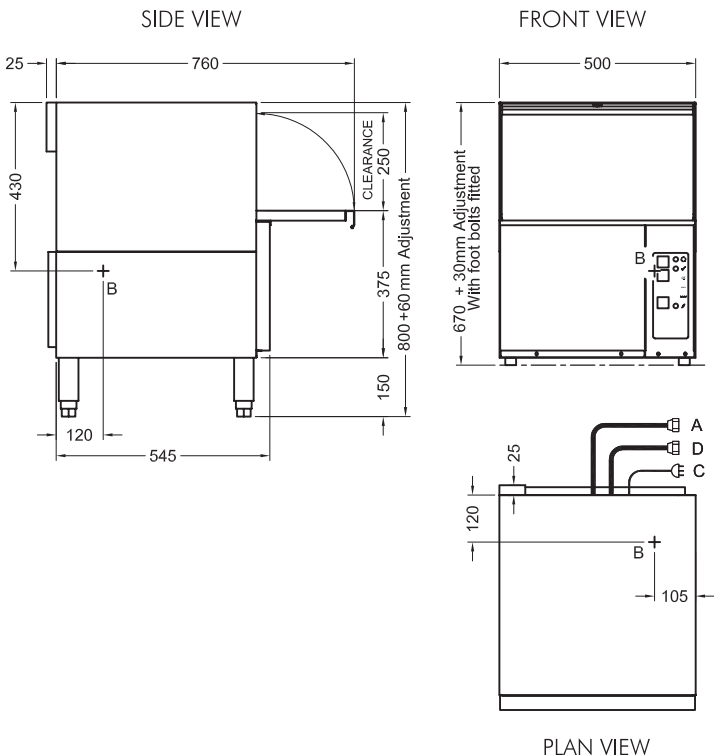

NOTE: Due to constant product improvement these specifications may be amended at any time



www.moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Telephone 03 9518 3888
 Facsimile 03 9518 3833
 Email vsales@moffat.com.au
 www.moffat.com.au

New South Wales
 Telephone 02 8833 4111
 Email nswsales@moffat.com.au

South Australia
 Telephone 08 8274 2116
 Email dmiller@moffat.com.au

Queensland
 Telephone 07 3630 8600
 Email qldsales@moffat.com.au

Western Australia
 Telephone 08 9305 8855
 Email jberent@moffat.com.au

